
VICTOR


PRINT SPECIFICATIONS



VICTOR

PRINTABLE SURFACES

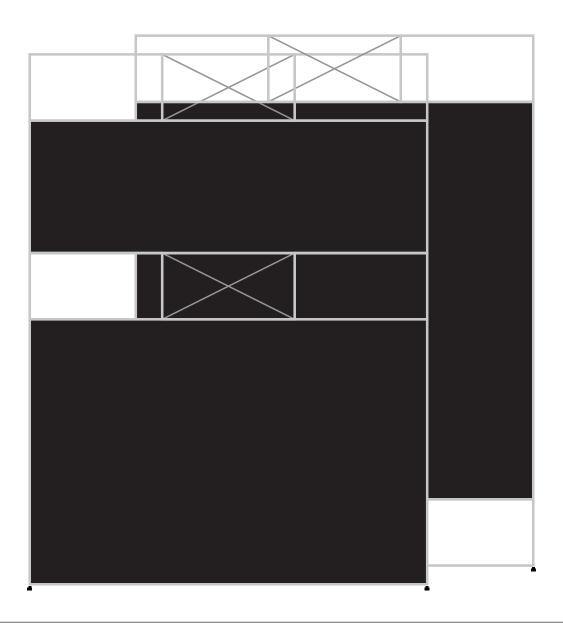

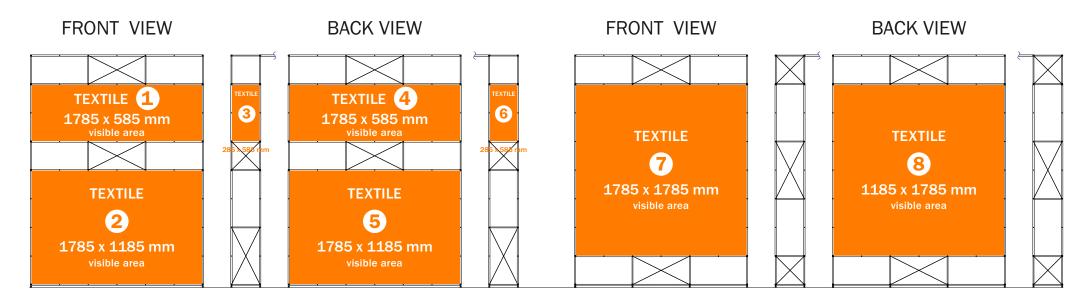


TOP VIEW













Data format: e.g. 1807 x 607 mm

The format in which your print data should be created.

Included in this format are: 11 mm Trimming for the keter and its attachment.

This trim is required for production and is later in the profile groove.

Please place backgrounds and edge Objects always up to the border of your data format to avoid white margins.



Final size: e.g. 1785 x 585 mm


In this format your picture motive is afterwards visible



Safety distance:

3 mm (on all sides)

This is measured from the final format and prevents unwanted gating your texts and information during the production.



(not visible area) textile surface

In general:

Background images, gradients and graphics should always be created up to the edge of the data format, as smaller tolerances can occur during the processing of your print product.

Color mode:

The color mode of your print data must be CMYK, otherwise a changed, optical overall impression can be created after the printing process. (Data in RGB colour mode are automatically converted by us to CMYK).

File format: The resolution of your files should be at least 300 dpi. Images and graphics should be as high resolution as possible.

If you want to create images on a scale of 1:1, they should have at least 72 dpi.Otherwise the print may appear pixelated.

Output Format: It is best to save your documents in PDF format. Make sure to embed fonts and (if possible) reduce transparency.

Multi-page documents: Please send them in chronological order as a single PDF file.

Please name individual documents according to our naming and with clearly assigned image titles. Please always use your order number - e.g:

(order_111111_victor.pdf) (order_111111_victor_vinyl_1.jpg) (order_111111_victor_textile_1.jpg) etc.